STATION **APACHE**

ENERGY STORAGE *SERIES*

AC charging wallbox

The Apache charging station can be configured with coiled cables or with sockets with shutter up to a maximum of 2 x 22 kW.
The standard version is produced with Type 2 cables or sockets.
Based on customer requirements, different models can be supplied, in Plug & Charge version or with control electronics.
The high quality of the materials ensures long service life and resistance to the most aggressive environments.
The wide front panel is suitable for graphic customization with the customer's branding.
On request, the charging station can be supplied equipped with OCPP 1.6 control.

General Specifications

Mechanical resistance	IP54 / IK10
Enclosure material	Painted stainless steel
Operating temperature	From -25°C to +50°C
Storage temperature	From -40°C to +60°C
Operating humidity	From 5% to 95% non-condensing zone
Signaling	RGB color indicator
Network connection	GSM / WiFi
Front lock	with key
Display	Optional
Charging control	Mode 3 sec. IEC 61851
Dimensions	380 x 1553 x 222 mm
Weight	30 kg

APACHE

Detas SpA - EvChargers division
ISO9001 / ISO14001 certified company
Via Treponti, 29 - 25086 Rezzato BS - Italy
www.evchargers.it
+39 030 259 4120 - info@evchargers.it

STATION APACHE

STATION SERIES

Models with Type 2 cables

Model	Apache Plug&Charge T2C	Apache T2C	Apache T2TC
Code	**40325**	**40345**	**40384**
Input voltage	230 VAC +/- 10%	230 VAC +/- 10%	400 VAC +/- 10%
Max current	**64 A**	**64 A**	**64 A**
Max power	7,4 + 7,4 kW	7,4 + 7,4 kW	22 + 22 kW
Stand-by consumption	4 W	4 W	4,5 W
Charging	Mode 3 sec. IEC 61851	Mode 3 sec. IEC 61851	Mode 3 sec. IEC 61851
AC output voltage	230 VAC (1P + N + PE)	230 VAC (1P + N + PE)	Trifase 400 VAC
Output	2 × 5 m coiled Type 2 cables	2 × 5 m coiled Type 2 cables	2 × 5 m coiled Type 2 cables
Electrical protection	SPD + Fuses	SPD + Fuses	SPD + Fuses
Electrical safety devices	2 x Miniature circuit breakers and 2 x Type B residual current devices or 1 x RCBO (Integrated RCBO)	2 x Miniature circuit breakers and 2 x Type B residual current devices or 1 x RCBO (Integrated RCBO)	2 x Miniature circuit breakers and 2 x Type B residual current devices or 1 x RCBO (Integrated RCBO)
Meters	2 x MID certified	2 x MID certified	2 x MID certified
Operation	Plug&Charge	Via app	Via app
Output power adjustment	Internal switch	Via app	Via app
User profiles management	No	Yes	Yes
Payment management	No	Yes	Yes
Installation	Floor-mounted with anchor bolts and back plate	Floor-mounted with anchor bolts and back plate	Floor-mounted with anchor bolts and back plate

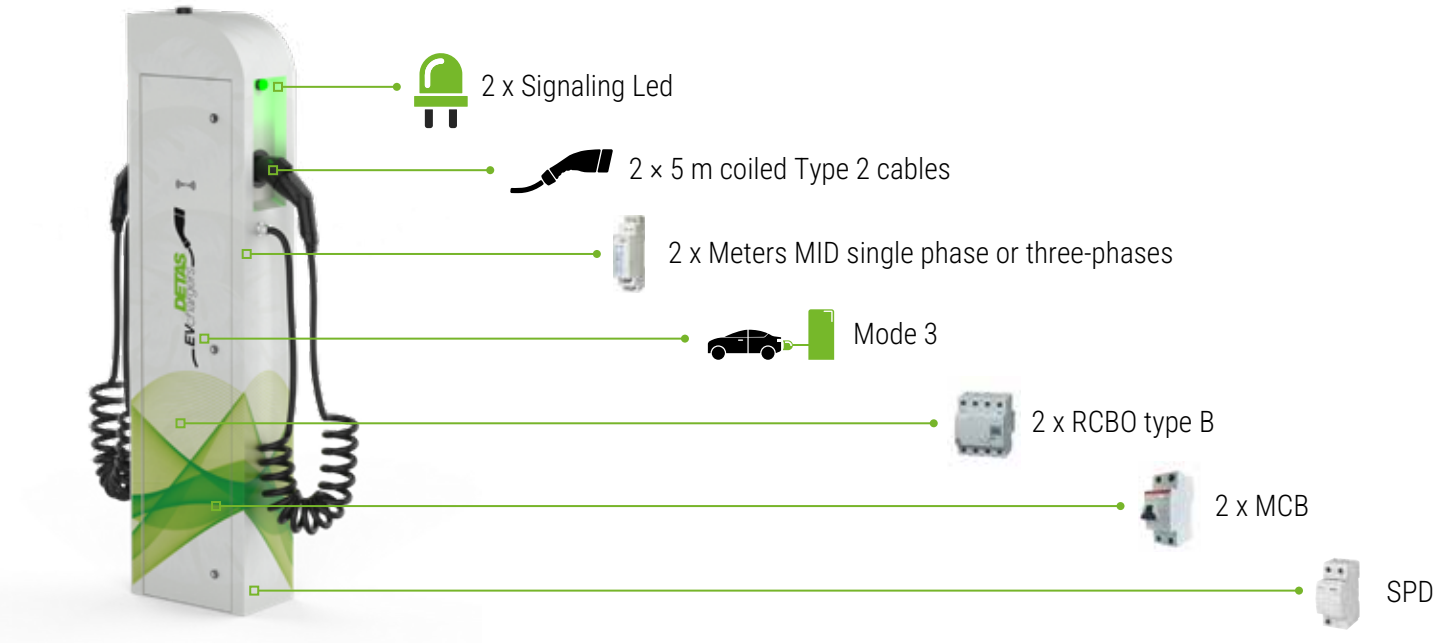

Detas SpA - EvChargers division
ISO9001 / ISO14001 certified company
Via Treponti, 29 - 25086 Rezzato BS - Italy
www.evchargers.it
+39 030 259 4120 - info@evchargers.it

STATION APACHE

STATION SERIES

Models with Type 2 sockets

Model	Apache T2S	Apache T2TS
Code	**40344**	**40364**
Input voltage	230 VAC +/- 10%	400 VAC +/- 10%
Max current	**64 A**	**64 A**
Max power	7,4 + 7,4 kW	22 + 22 kW
Stand-by consumption	4 W	4,5 W
Charging	Mode 3 sec. IEC 61851	Mode 3 sec. IEC 61851
AC output voltage	230 VAC (1P + N + PE)	Trifase 400 VAC
Output	2 x Type 2 interlocked sockets with shutter	2 x Type 2 interlocked sockets with shutter
Electrical protection	SPD + Fuses	SPD + Fuses
Electrical safety devices	2 x Miniature circuit breakers and 2 x Type B residual current devices or 1 x RCBO (Integrated RCBO)	2 x Miniature circuit breakers and 2 x Type B residual current devices or 1 x RCBO (Integrated RCBO)
Meters	2 x MID certified	2 x MID certified
Output power adjustment	Yes	Yes
User profiles management	Yes	Yes
Payment management	Yes	Yes
OCCP 1.2 - 2.0	On request	On request
Installation	Floor-mounted with anchor bolts and back plate	Floor-mounted with anchor bolts and back plate

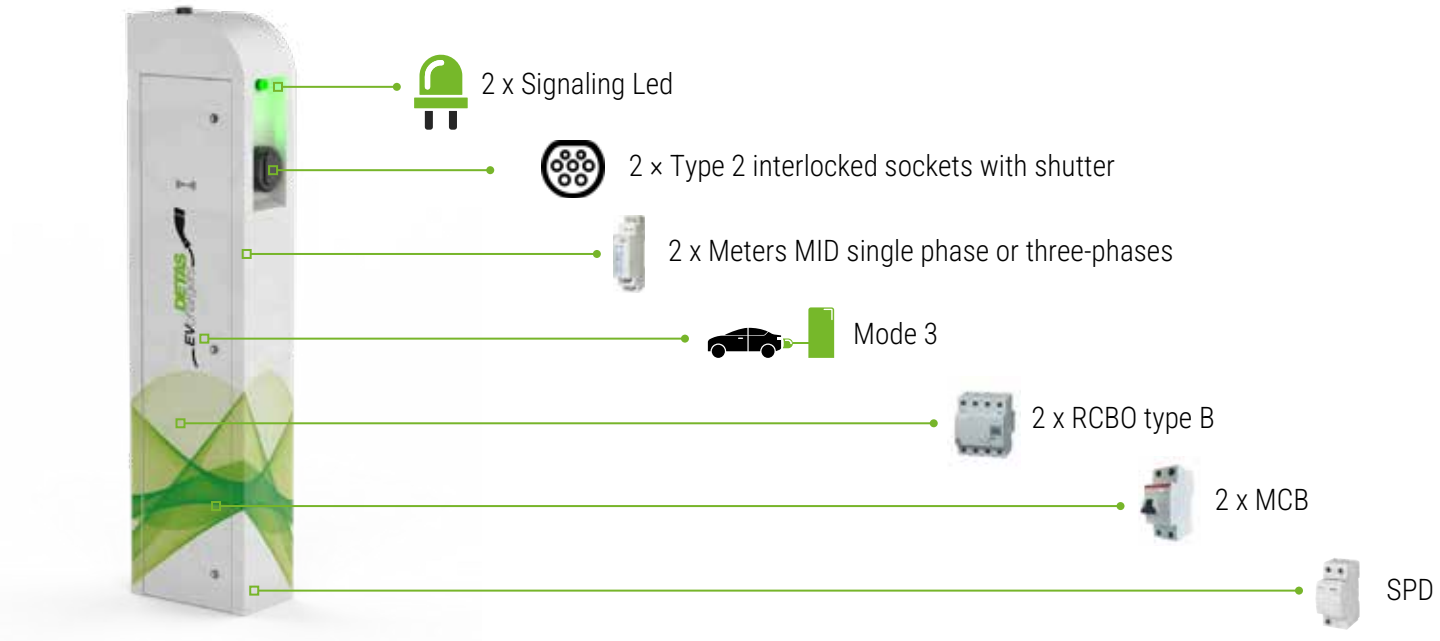

Detas SpA - EvChargers division
ISO9001 / ISO14001 certified company
Via Treponti, 29 - 25086 Rezzato BS - Italy
www.evchargers.it
+39 030 259 4120 - info@evchargers.it