

Station Apache

AC charging station

The Apache charging station can be configured with spiral cables or plugs with shutter up to a maximum of 2x22kW. The standard version come with Type 2 cables or plugs. Depending on customer requirements, it is possible to supply different models, in plug&charge version or with smart management. The high quality materials ensure long life and resistance to the most aggressive environments. The large front panel is customizable with the customer visual elements.

Technical specifications


Mechanical resistance	IP54 / IK09
Material	Galvanized steel RAL7035
Operating temperature	From -25°C to +45°C
Storage temperature	From -40°C to +60°C
Operating humidity	From 5% to 95% without condensation
LED indication	RGB Indicator
Front door lock	Key lock
Display	Optional
Charging systems	Mode 3 sec. IEC 6181
Dimensions (DxWxH)	380x222x1521 mm
Weight	30 kg



STATION


Apache - Single Type2 cable

Code	40300	40320
Model	Apache 1PH	Apache 3PH
Input Voltage	Single-phase 230 VAC 50/60Hz	Three-phase 400 VAC
Max current	32 A	32 A
Max power	7,4 kW	22 kW
Charging system	Mode 3 sec. IEC 61851	Mode 3 sec. IEC 61851
AC output voltage	230 VAC	400 VAC
Output	5m Type2 Cable	5m Type2 Cable
Electrical protections	SPD + Fuses	SPD + Fuses
Electrical safety devices	Type B magnetothermic and differential switch	Type B magnetothermic and differential switch
Meters	MID certified	MID certified
Regolazione potenza in uscita	Yes	Yes
User profile management	Yes	Yes
Payment credit card operation	Yes	Yes
Mounting	Floor mount with anchor bolts and counterplate	Floor mount with anchor bolts and counterplate

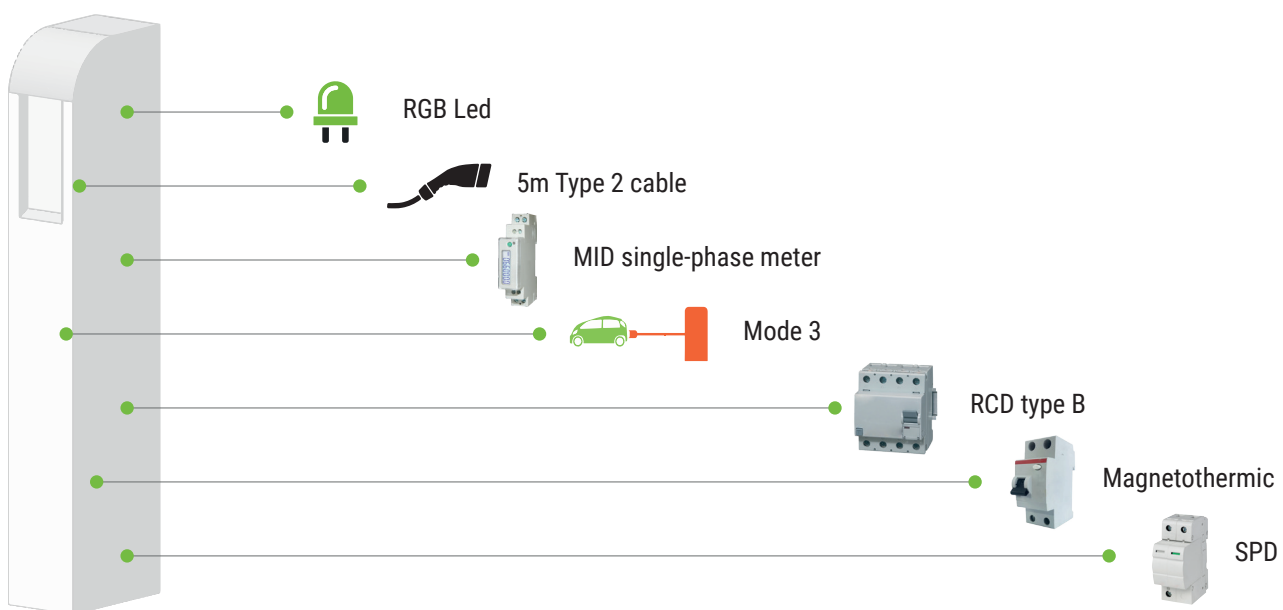

Apache 2X - Two Type2 cables

Code	40345	40380
Model	Apache 1PH	Apache 3PH
Input Voltage	Single-phase 230 VAC 50/60Hz	Three-phase 400 VAC
Max current	64 A	64 A
Max power	7,4 + 7,4 kW	22 + 22 kW
Charging system	Mode 3 sec. IEC 61851	Mode 3 sec. IEC 61851
AC output voltage	230 VAC	400 VAC
Output	2 x 5m Type2 Cables	2 x 5m Type2 Cables
Electrical protections	SPD + Fuses	SPD + Fuses
Electrical safety devices	2 x Magnetothermic switches and type B differential	2 x Magnetothermic switches and type B differential
Meters	2 x MID certificates	2 x MID certificates
Regolazione potenza in uscita	Yes	Yes
User profile management	Yes	Yes
Payment credit card operation	Yes	Yes
Mounting	Floor mount with anchor bolts and counterplate	Floor mount with anchor bolts and counterplate

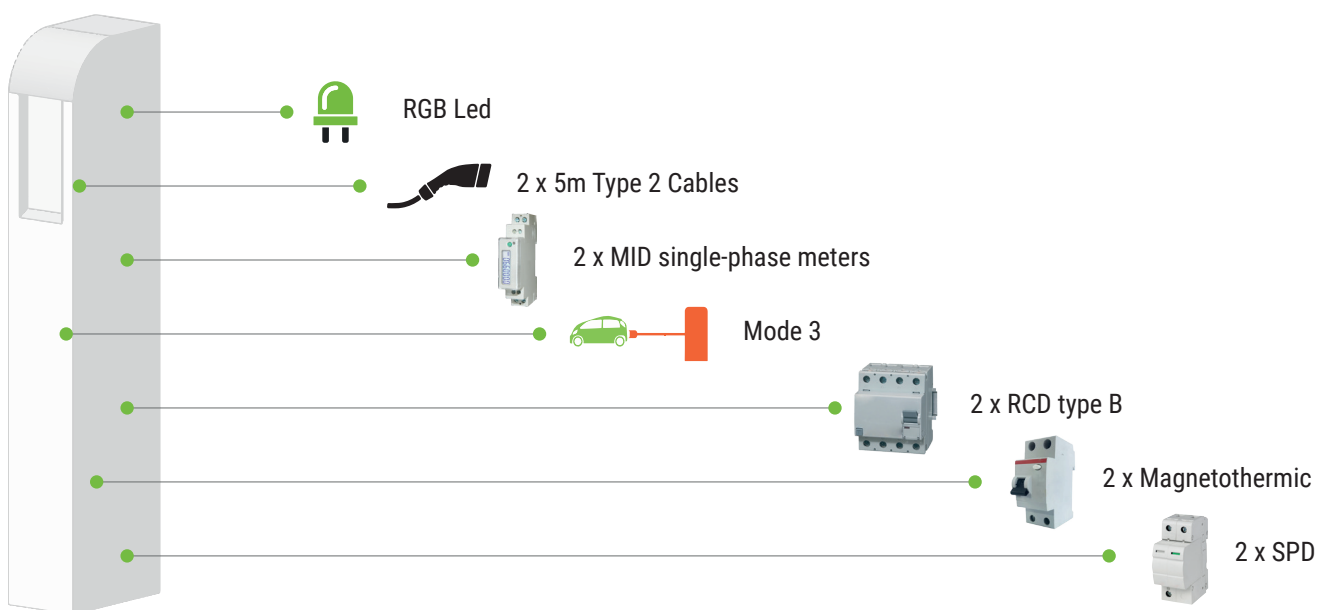

Apache 2X - Two Type2 plugs

Code	40340	40360
Model	Apache 1PH	Apache 3PH
Input Voltage	Single-phase 230 VAC 50/60Hz	Three-phase 400 VAC
Max current	64 A	64 A
Max power	7,4 + 7,4 kW	22 + 22 kW
Charging system	Mode 3 sec. IEC 61851	Mode 3 sec. IEC 61851
AC output voltage	230 VAC	400 VAC
Output	2 x T2 plugs with shutter	2 x T2 plugs with shutter
Electrical protections	SPD + Fuses	SPD + Fuses
Electrical safety devices	2 x Magnetothermic switches and type B differential	2 x Magnetothermic switches and type B differential
Meters	2 x MID certificates	2 x MID certificates
Regolazione potenza in uscita	Yes	Yes
User profile management	Yes	Yes
Payment credit card operation	Yes	Yes
Mounting	Floor mount with anchor bolts and counterplate	Floor mount with anchor bolts and counterplate

