

Apache / AC charging wallbox

The Wallbox Apache is a high profile product characterized by the stainless steel body with opening door. High quality materials ensure long life and resistance to the most aggressive environments. The Apache Wallbox can be configured with spiral cables or shuttered sockets up to a maximum of 2x22kW. The standard version is manufactured with Type 2 cables or sockets. The standard model communicates with the backend systems thanks to a proprietary system while on request it is possible to communicate through OCPP.


Technical specifications

Mechanical resistance	IP65 / IK10
Housing material	Stainless steel AISI304
Operating temperature	From -25°C to +45°C
Storage temperature	From -40°C to +60°C
Operating humidity	5% to 95% non-condensing
Network connection	IoT GSM / WiFi / Bluetooth
Signalling	RGB colour indicator
Controllo di Recharge	Mode 3 acc. IEC 61851
Front lock	Key-operated
Display	On request
Dimensions	344 x 254 x 183 mm
Weight	5,7 kg



APACHE

Model	Wallbox Apache Plug&Charge	Wallbox Apache Smart T2C	Wallbox Apache Smart T2S
Code	40425	40430	40440
Input Voltage	230 VAC 50/60Hz	230 VAC 50/60Hz	230 VAC 50/60Hz
Max. current/power	64A / 2x7,4kW	64A / 2x7,4kW	64A / 2x7,4kW
Stand-by consumption	4 W	4 W	4 W
Recharge	Mode 3 acc. IEC 61851	Mode 3 acc. IEC 61851	Mode 3 acc. IEC 61851
Output	2 x Spiral Cables 5m Type 2	2 x Spiral Cables 5m Type 2	2 x Type 2 interlocked sockets with shutter
OCPP	Not available	On request	On request
Meters	2 x MID certified	2 x MID certified	2 x MID certified
Electrical protections	Not included	Not included	Not included
Operation	Plug&Charge	Via app	Via app
Output power adjustment	Internal switch	Via app	Via app

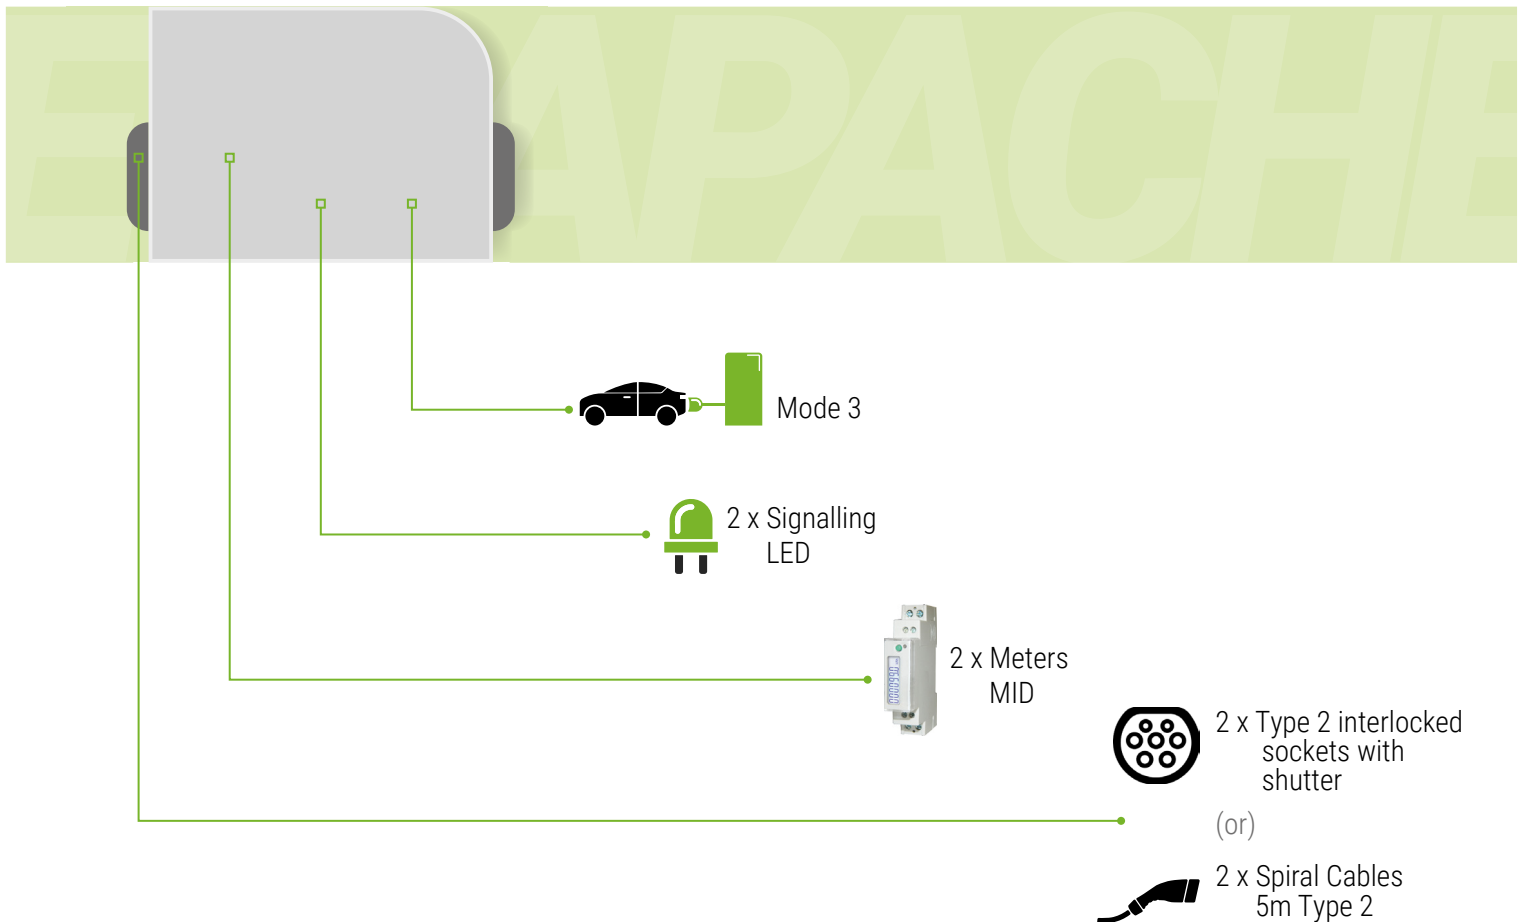

Model	Wallbox Apache Smart T2TC	Wallbox Apache Smart T2TS
Code	40480	40460
Input Voltage	Three-phase 400 VAC	Three-phase 400 VAC
Max. current/power	64A / 2x22kW	64A / 2x22kW
Stand-by consumption	4,5 W	4,5 W
Recharge	Mode 3 acc. IEC 61851	Mode 3 acc. IEC 61851
Output	2 x Spiral Cables 5m Type 2	2 x Type 2 interlocked sockets with shutter
OCPP 1.2 - 2.0	On request	On request
Meters	2 x MID certified	2 x MID certified
Electrical protections	Not included	Not included
Operation	Via app	Via app
Output power adjustment	Via app	Via app

